THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|---|---|---|---|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 09/05/22 | GUTTADAURO |

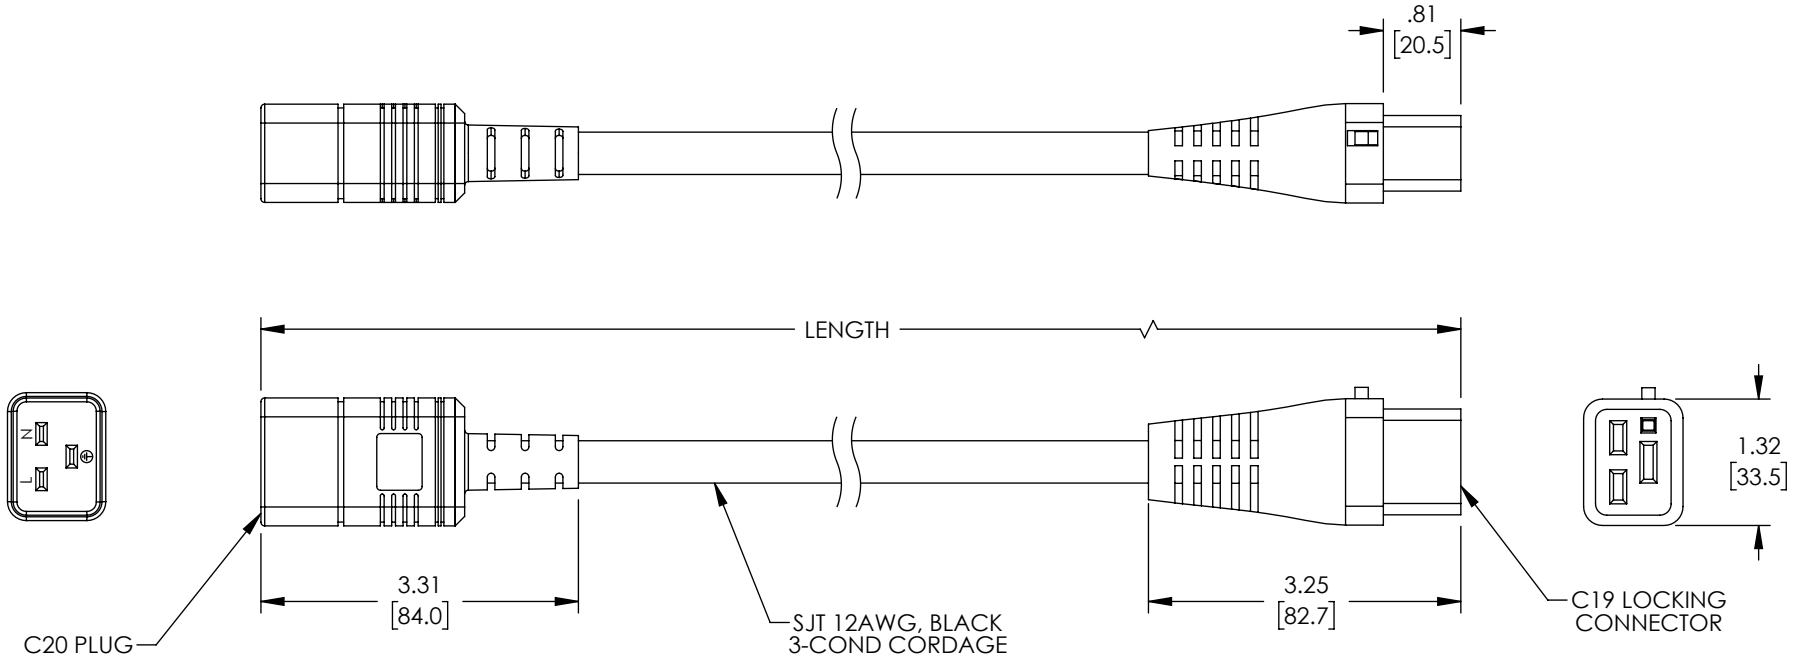


| TABULATION BLOCK | |
|---|---|
| ITEM NO. | LENGTH ±.6 [15] |
| C19LC20-20-3F | 36.0 [914] |
| C19LC20-20-6F | 72.0 [1829] |

NOTES:

1. PLUG: TYPE EN60320 C20, BLACK
2. CONNECTOR: EN60320 C19 LOCKING, BLACK
3. CORDAGE: SJT3X12AWG, BLACK
   COLOR CODING OF CONDUCTORS: BLACK, WHITE, GREEN
   APPROVALS: UL, CSA
   RATING: 20A/250V
4. OPTIONAL LABELS MAY INCLUDE UL, CURRENT AND/OR WARNING.
5. CABLE ASSEMBLIES SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5]
.XX = ± .02 [.5]
.XXX = ± .005 [.13]
FRACTIONS ± 1/32
ANGLES ± 1°

THIRD-ANGLE PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN BY VTHANGARAJ | 09/05/22 |
| CHECKED BY DGUST | 09/05/22 |
| APPROVED BY GUTTADAURO | 09/05/22 |

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY occur

L-com an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY
POWER PRODUCTS

PRODUCT DESCRIPTION
IEC LOCK C19 TO C20, 20A, 250V

| SIZE | CAGE CODE | ITEM NO. | REV. |
|---|---|---|---|
| A | 43321 | C19LC20-20 | A |

SCALE: NONE | CAD FILE: C19LC20-20.SLDDRW | SHEET 1 OF 1

T-Rev.D