

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	09/25/2023	HBAKKE	GUTTADAURO

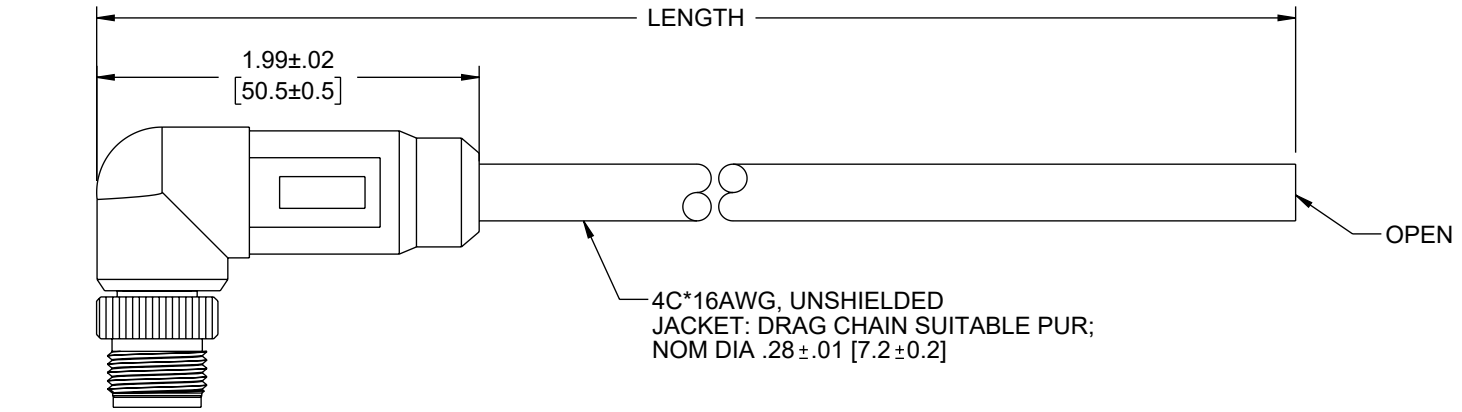

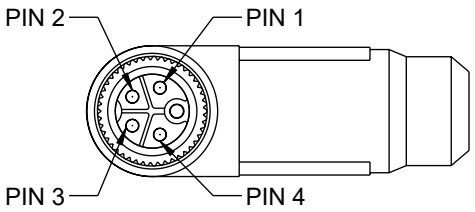

P1
M12 MALE RIGHT ANGLE CONNECTOR
4 POSITION L-CODED

P1	WIRE MAP	OPEN
BROWN 1		BROWN
WHITE 2		WHITE
BLUE 3		BLUE
BLACK 4		BLACK

ITEM NO	LENGTH [TOL.]	
	METERS [mm]	FEET [IN]
TRGL409-P6G-05M	0.5 [+35/-15]	1.64 [+1.38/-.59]
TRGL409-P6G-1M	1 [+35/-20]	3.28 [+1.38/-.79]
TRGL409-P6G-2M	2 [+35/-30]	6.56 [+1.38/-1.18]
TRGL409-P6G-3M	3 [+35/-30]	9.84 [+1.38/-1.18]
TRGL409-P6G-5M	5 [±60]	16.40 [±2.36]
TRGL409-P6G-10M	10 [±80]	32.81 [±3.15]
TRGL409-P6G-15M	15 [±80]	49.21 [±3.15]

NOTES:

ELECTRICAL:
- NOMINAL VOLTAGE: 300V
- OPERATING VOLTAGE: 63V DC/AC MAX.
- OPERATING CURRENT PER CONTACT: 12A MAX.

APPLICATION:
- INGRESS PROTECTION RATING IS IP67 (MATED)
- RECOMMENDED TORQUE VALUE: 0.6Nm
- BEND RADIUS FIXED: 57.6mm MIN.
- BEND RADIUS MOBILE: 108mm MIN.
- TORSION STRESS: ±180°/meter.

ENVIRONMENTAL:
- TEMPERATURE RANGE FIXED: -25°C TO +80°C
- TEMPERATURE RANGE MOBILE: -25°C TO +70°C
- CABLE JACKET RESISTANCE: OIL
- CABLE JACKET FLAME RATING: HB (UL 94).

MISCELLANEOUS
- CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]

OVERALL CABLE LENGTH TOLERANCE:
≤12 [305] = +1 [25] / -0
>12 [305] ≤60 [1524] = +2 [51] / -0
>60 [1524] ≤120 [3048] = +4 [102] / -0
>120 [3048] ≤300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL OTHER DIMENSIONAL TOLERANCES:
.X = ± .2 [5]
.XX = ± .02 [.5]
.XXX = ± .005 [.13]
FRACTIONS ± 1/32
ANGLES ± 1°

THIRD-ANGLE PROJECTION

APPROVALS	DATE
DRAWN BY HBAKKE	09/25/2023
CHECKED BY DMAY	09/25/2023
APPROVED BY DGUST	09/25/2023

CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY

COLOR VARIATIONS MAY occur

L-com an INFINITE brand
50 High Street, West Mill,
North Andover, MA 01845 USA.
Phone: 1.800.341.5266
1.978.682.6936

CATEGORY
TELECOM/MODULAR

PRODUCT DESCRIPTION
M12 4 POSITION IP67 L-CODE PIGTAIL CABLE ASSEMBLY, UNSHIELDED
16AWG PUR JACKET, RIGHT ANGLE MALE TO OPEN, BLACK

SIZE	CAGE CODE	ITEM NO.	REV.
A	43321	TRGL409-P6G	A

SCALE: NONE | CAD FILE: TRGL409-P6G.SLDDRW | SHEET 1 OF 1

T-Rev.D1